




# HELIX IIIA HX03

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**IIIA**

STANDARD	NIJ 0101.06
NIJ MODEL	GPXIIIA
SERIES	HX03
THREAT LEVEL	IIIA
GENDER	Male
AREAL DENSITY	0.90 psf
THINNESS	0.22"
PLY COUNT	29
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/ Spectra Shield® Hybrid
STITCHING	Top Stitch, Bottom Stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

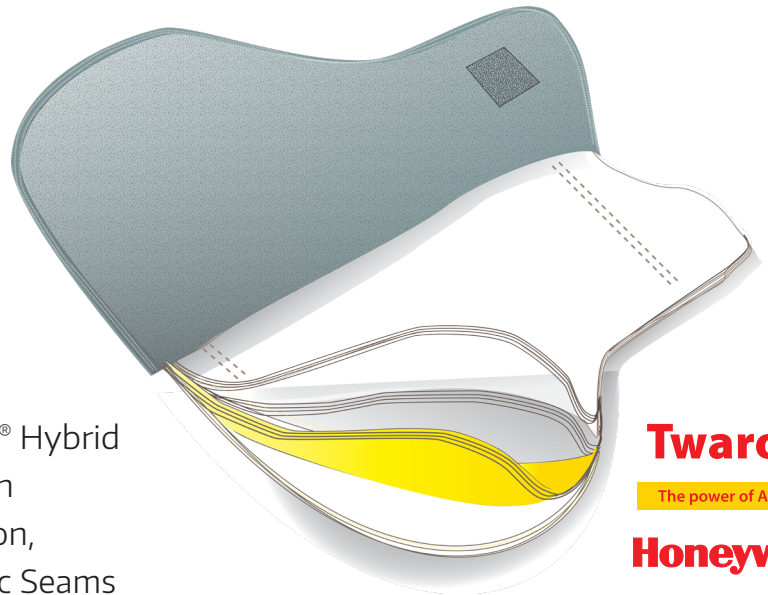

**Twaron®**  
The power of Aramid  
**Honeywell**



## BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1855 fps	.44 Mag New V50	1726 fps
.357 Sig Conditioned V50	1781 fps	.44 Mag Conditioned V50	1670 fps
.357 Sig BFS	27.9 mm	.44 Mag BFS	35.3 mm
.357 Sig New RPI	2094.4	.44 Mag New RPI	1917.8
.357 Sig Conditioned RPI	1978.9	.44 Mag Conditioned RPI	1855.6

## SPECIAL THREAT TESTING

Winchester 9mm 127gr SXT +P+ RA9TA | Speer .357 SIG 125gr GDHP  
FN 5.7mm X 28mm 27gr HP SS195LF | FN 5.7mm X 28mm 40gr Blue-Tip SS197SR  
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058  
(866) 920-5940 | www.gharmorsystems.com

**READY IS THE ONLY OPTION.**