




LITEX II LX02

TECHNICAL SUMMARY & NIJ DATA


THREAT LEVEL
II

STANDARD	NIJ 0101.06
NIJ MODEL	GPBII-3-F3
SERIES	LX02
THREAT LEVEL	II
GENDER	Female Structured
AREAL DENSITY	0.90 psf
THINNESS	0.22"
PLY COUNT	22
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/Goldflex® Hybrid
STITCHING	Diamond Quilt, Perimeter Stitch, Shoulder Tack, Bottom Stitch, Orthogonal Bias, Front Panel Stitch
PANEL COVER	70 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

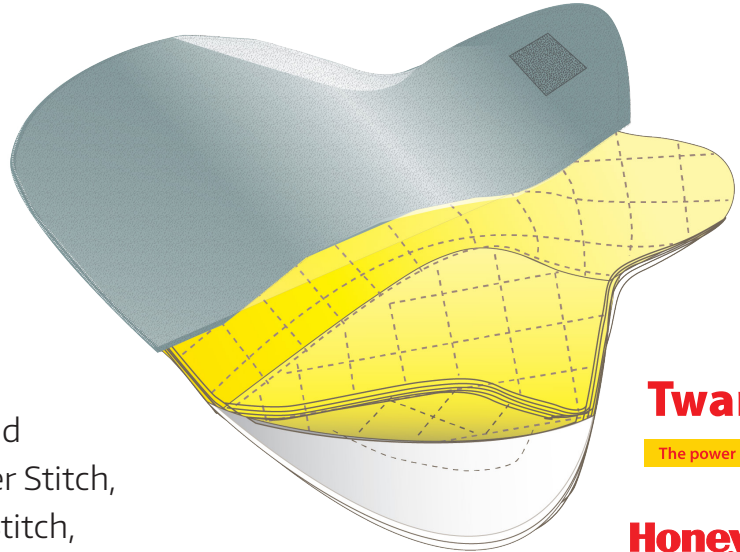

Twaron®
The power of Aramid

Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1623 fps	.357 Mag New V50	1594 fps
9mm Conditioned V50	1570 fps	.357 Mag Conditioned V50	1584 fps
9mm BFS	27.3 mm	.357 Mag BFS	32.0 mm
9mm New RPI	1803.0	.357 Mag New RPI	1771.0
9mm Conditioned RPI	1744.0	.357 Mag Conditioned RPI	1760.0

SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.