




ProX IIA PX03

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIA

STANDARD	NIJ 0101.06
NIJ MODEL	BA-2A00S-MR01
SERIES	PX03
THREAT LEVEL	IIA
GENDER	Neutral
AREAL DENSITY	0.73 psf
THINNESS	0.16"
SIZE RANGE	C1-C5
COMPOSITION	Twaron® Microlaminate, Gold RS®
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

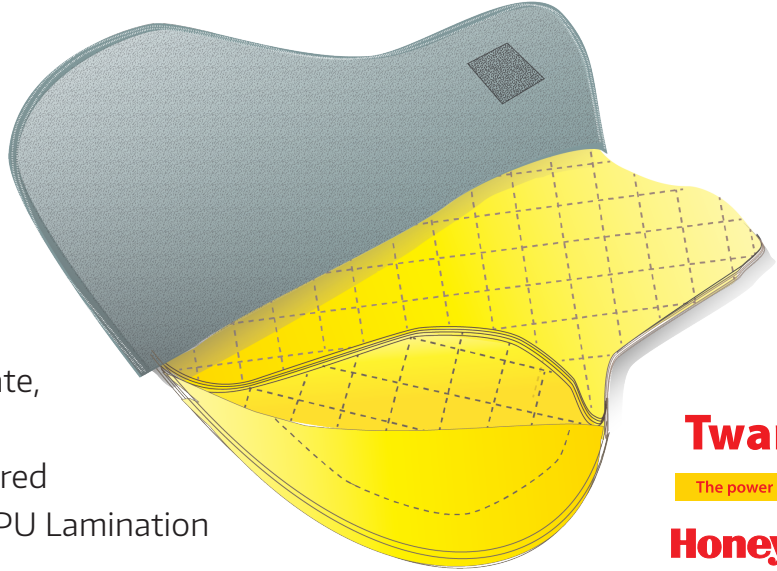

Twaron®
The power of Aramid
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1469 fps	.40 S&W New V50	1537 fps
9mm Conditioned V50	1477 fps	.40 S&W Conditioned V50	1502 fps
9mm BFS	30.99 mm	.40 S&W BFS	33.10 mm
9mm New RPI	2012.3	.40 S&W New RPI	2105.5
9mm Conditioned RPI	2023.2	.40 S&W Conditioned RPI	2057.5



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.