




ProX IIIA PX02

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	GPCIIIA-2
SERIES	PX02
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	1.44 psf
THINNESS	0.36"
PLY COUNT	12
SIZE RANGE	C1-C5
COMPOSITION	Aramid Laminate
STITCHING	2x2" Diamond Quilt, Perimeter Stitch, Shoulder Tack
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

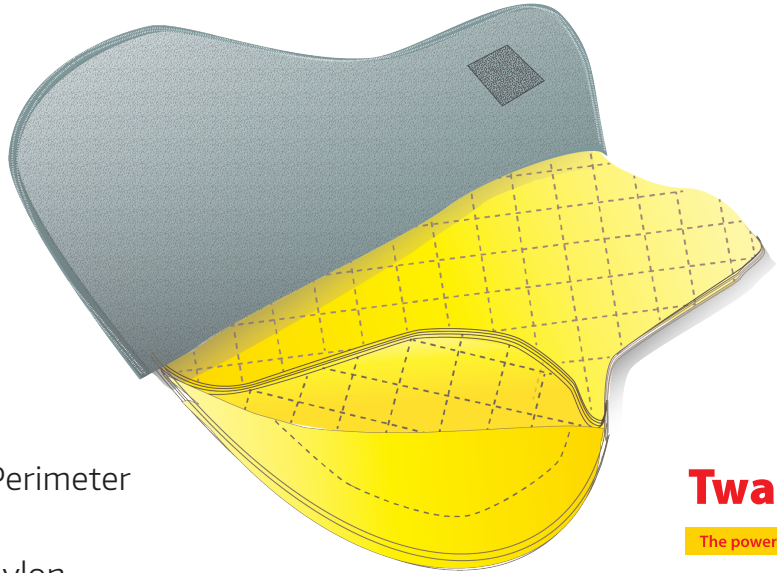

Twaron®

The power of Aramid



BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1799 fps	.44 Mag New V50	1608 fps
.357 Sig Conditioned V50	1794 fps	.44 Mag Conditioned V50	1674 fps
.357 Sig BFS	24.9 mm	.44 Mag BFS	34.2 mm
.357 Sig New RPI	1249.3	.44 Mag New RPI	1116.7
.357 Sig Conditioned RPI	1245.8	.44 Mag Conditioned RPI	1162.5



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.