




ETHOS IIIA EX02

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	BA-3A00S-SX03
SERIES	EX02
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	0.86 psf
THINNESS	0.21"
SIZE RANGE	C1-C5
COMPOSITION	SAATI, Gold Shield®, and Dyneema®
PANEL COVER	Dual Cover, Laminated Stretch with TPU Lamination System
WARRANTY	5 Years

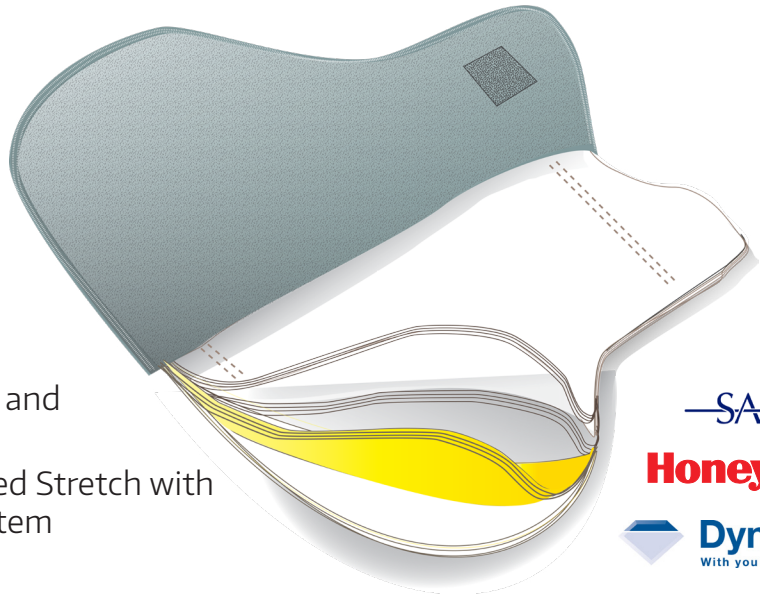

BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1838 fps	.44 Mag New V50	1712 fps
.357 Sig Conditioned V50	1825 fps	.44 Mag Conditioned V50	1675 fps
.357 Sig BFS	30.5 mm	.44 Mag BFS	37.8 mm
.357 Sig New RPI	2137.2	.44 Mag New RPI	1990.7
.357 Sig Conditioned RPI	2122.1	.44 Mag Conditioned RPI	1947.7

SPECIAL THREAT TESTING

Winchester 9mm 127 gr. SXT +P+ RA9TA | Federal 9mm 100 gr. Frangible | Speer .357 SIG 125 gr. GDHP
 Winchester .40 S&W 165 gr. SXT | Romanian 7.62x25mm 85 gr. Tokarev | FN 5.7x28mm 40 gr. Blue Tip SS197SR
 FN 5.7x28mm 27 gr. JHP SS195 LF | Fragmentation Testing – 2 gr. RCC, 4 gr. RCC, 16 gr. RCC, 64 gr. RCC, 17 gr. FSP
 Special threat testing conducted at NIJ certified independent laboratory.
 Meets/exceeds requirements of DEA Body Armor Test Protocol and FBI Body Armor Test Protocol.



1 Sentry Drive | PO Box 280 | Dover, TN 37058
 (866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.