





HELIX II HX02

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL

II

STANDARD	NIJ 0101.06
NIJ MODEL	GPAII-2-F4
SERIES	HX02
THREAT LEVEL	II
GENDER	Structured Female
AREAL DENSITY	0.78 psf
THINNESS	0.20"
PLY COUNT	29
SIZE RANGE	C1-C5
COMPOSITION	Kevlar®/Goldshield®/ Spectra Shield® Hybrid
STITCHING	Diamond Quilt, Shoulder Tack, Bottom Stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

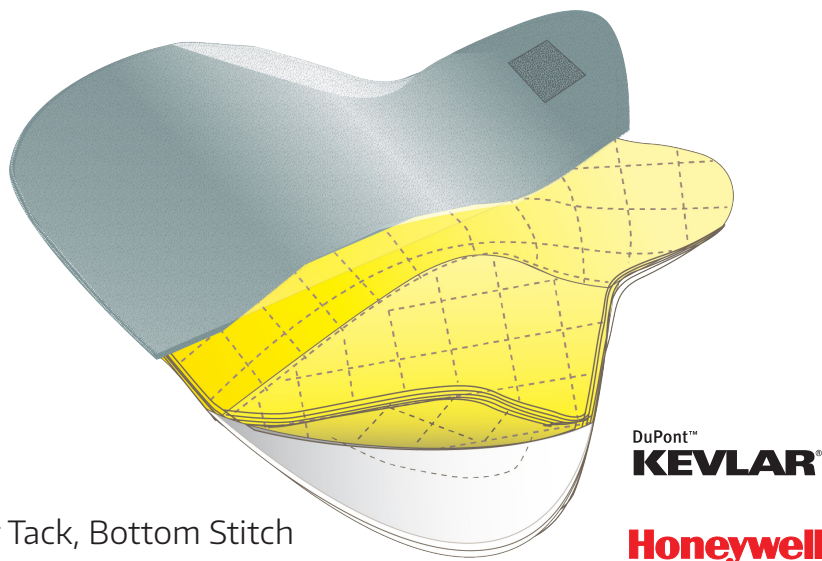

BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1672 fps	.357 Mag New V50	1670 fps
9mm Conditioned V50	1673 fps	.357 Mag Conditioned V50	1638 fps
9mm BFS	28.9 mm	.357 Mag BFS	33.3 mm
9mm New RPI	2143.6	.357 Mag New RPI	2141.0
9mm Conditioned RPI	2144.9	.357 Mag Conditioned RPI	2100.0

SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP

Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.