




HELIX IIIA HX03


TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	GPXIIIA-F
SERIES	HX03
THREAT LEVEL	IIIA
GENDER	Structured Female
AREAL DENSITY	0.90 psf
THINNESS	0.27"
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/ Spectra Shield® Hybrid
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

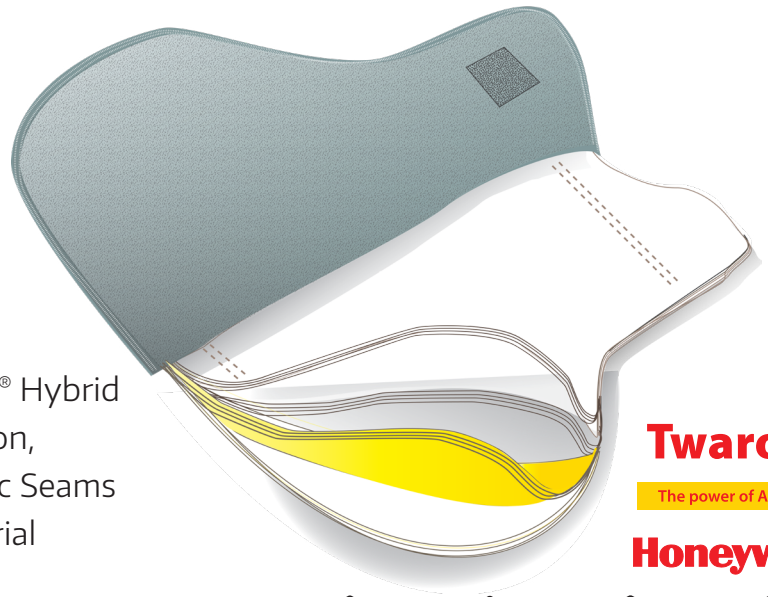

Twaron®
The power of Aramid
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1803 fps	.44 Mag New V50	1716 fps
.357 Sig Conditioned V50	1811 fps	.44 Mag Conditioned V50	1704 fps
.357 Sig BFS	29.05 mm	.44 Mag BFS	36.13 mm
.357 Sig New RPI	2003.3	.44 Mag New RPI	1906.6
.357 Sig Conditioned RPI	2012.2	.44 Mag Conditioned RPI	1893.3

SPECIAL THREAT TESTING

Winchester 9mm 127gr SXT +P+ RA9TA | Speer .357 SIG 125gr GDHP
FN 5.7mm X 28mm 27gr HP SS195LF | FN 5.7mm X 28mm 40gr Blue-Tip SS197SR
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.