




LITEX IIIA LX02

TECHNICAL SUMMARY & NIJ DATA


THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	GPBIIIA-3-F
SERIES	LX02
THREAT LEVEL	IIIA
GENDER	Female Structured
AREAL DENSITY	1.16 psf
THINNESS	0.27"
PLY COUNT	28
SIZE RANGE	C1-C5
COMPOSITION	Twaron®/Goldflex® Hybrid
STITCHING	Diamond Quilt, Perimeter Stitch, Shoulder Tack, Bottom Stitch, Orthogonal Bias, Front Panel Stitch
PANEL COVER	70 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

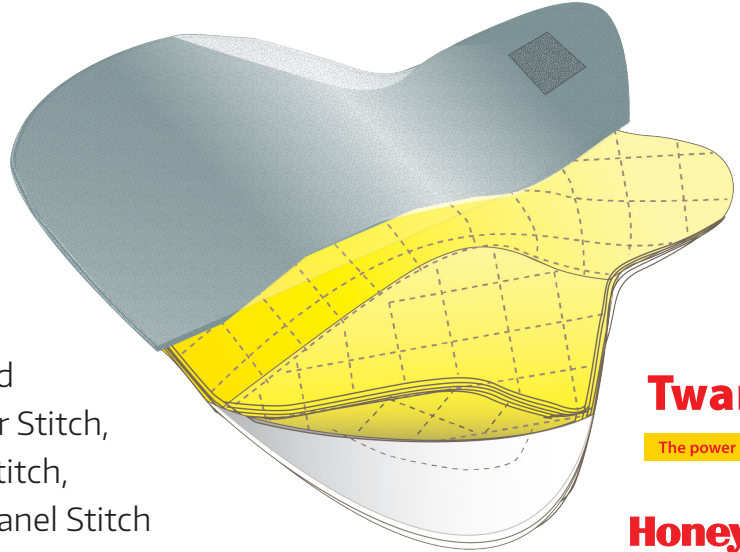

Twaron®
The power of Aramid

Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1769 fps	.44 Mag New V50	1584 fps
.357 Sig Conditioned V50	1717 fps	.44 Mag Conditioned V50	1546 fps
.357 Sig BFS	29.5 mm	.44 Mag BFS	38.1 mm
.357 Sig New RPI	1525.0	.44 Mag New RPI	1365.5
.357 Sig Conditioned RPI	1480.2	.44 Mag Conditioned RPI	1332.8

SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP | 5.7 x 28mm FN SS197SR 40gr
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.