




ProX II PX03

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL

II

STANDARD	NIJ 0101.06
NIJ MODEL	BA-2000S-MR01
SERIES	PX03
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	0.98 psf
THINNESS	0.22"
SIZE RANGE	C1-C5
COMPOSITION	Honeywell® Gold Shield®, Teijin Twaron® Microlaminate
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

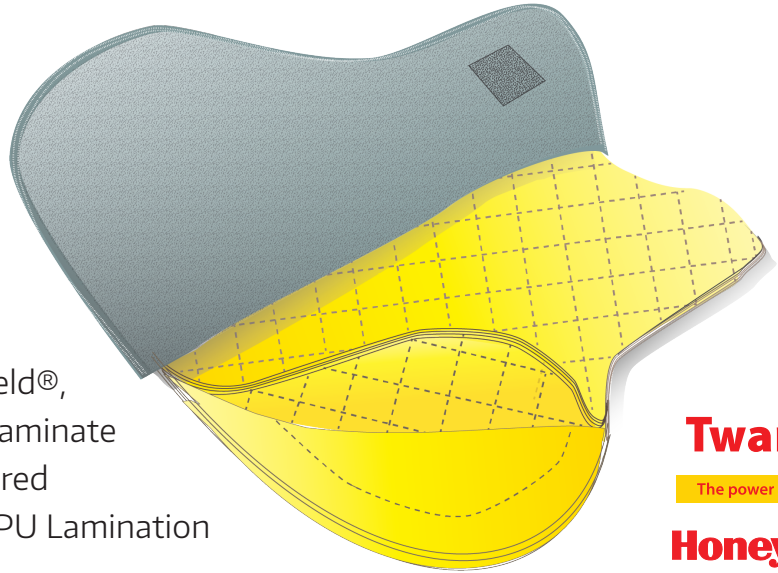

Twaron®
The power of Aramid
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1680 fps	.357 Mag New V50	1696 fps
9mm Conditioned V50	1658 fps	.357 Mag Conditioned V50	1606 fps
9mm BFS	26.62 mm	.357 Mag BFS	30.08 mm
9mm New RPI	1714.3	.357 Mag New RPI	1730.6
9mm Conditioned RPI	1691.8	.357 Mag Conditioned RPI	1638.8

SPECIAL THREAT TESTING

9 mm 124 gr. +P+ SXT | 9 mm 100 gr. Frangible | .357 Sig 125 gr. GDHP | .40 S&W 165 gr. SXT
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.