

TALON 2 TO2 TECHNICAL SUMMARY & NIJDATA

THREAT LEVEL 2

STANDARD NIJ 0115.00

NIJ MODEL GPS2-1

SERIES TO2

THREAT LEVEL Spike 2

GENDER Neutral

AREAL DENSITY 0.43 psf
THINNESS 0.11"

COMPOSITION | Kevlar® Correctional™


STITCHING | Single Tack

PANEL COVER | 200 Denier Ripstop Nylon,

Poly-backed, Ultra-Sonic Seams

DESICCANT | Patented ProTect®Material

WARRANTY | 5 Years

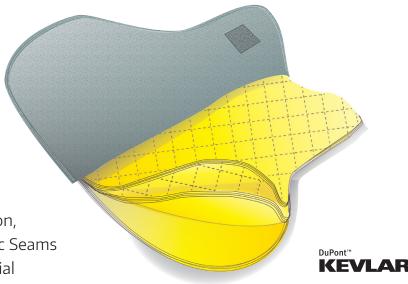





SPIKE RESISTANCE RATING			
Protection Threat	Level 2	Energy Level 1 (E1)/Joules	24.3ft-lbs/33J
Protection Class	Spike	Energy Level 2 (E2)/Joules	36.9ft-lbs/50J

WARNING: This product is not intended to protect the wearer from commercially-made edged weapons, handgun or rifle fire.

