

TALON 3 TO2 TECHNICAL SUMMARY & NIJDATA

THREAT LEVEL 3

STANDARD | NIJ 0115.00

NIJ MODEL | GPS3-1

SERIES | T02

THREAT LEVEL | Spike 3

GENDER | Neutral

AREAL DENSITY | 0.52 psf

THINNESS 0.13"

COMPOSITION | Kevlar® Correctional™


STITCHING | Single Tack

PANEL COVER | 200 Denier Ripstop Nylon,

Poly-backed, Ultra-Sonic Seams

DESICCANT | Patented ProTect® Material

WARRANTY | 5 Years

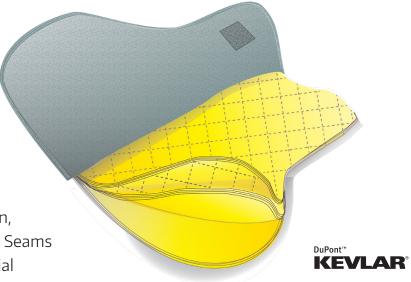





SPIKE RESISTANCE RATING			
Protection Threat	Level 3	Energy Level 1 (E1)/Joules	31.7ft-lbs/43J
Protection Class	Spike	Energy Level 2 (E2)/Joules	47.9ft-lbs/65J

WARNING: This product is not intended to protect the wearer from commercially-made edged weapons, handgun or rifle fire.

