




# TALONX II/2 TX02

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL

II/2

STANDARDS	NIJ 0101.06 NIJ 0115.00
NIJ MODEL	GPMII2-4
SERIES	TX02
THREAT LEVELS	Level II Spike 2
GENDER	Neutral
AREAL DENSITY	1.10 psf
THINNESS	0.34"
PLY COUNT	36
SIZE RANGE	C1-C5
COMPOSITION	Kevlar® Hybrid
STITCHING	Diamond Quilt, Top Stitch
PANEL COVER	200 Denier Ripstop Nylon, Poly-backed, Ultra-Sonic Seams
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

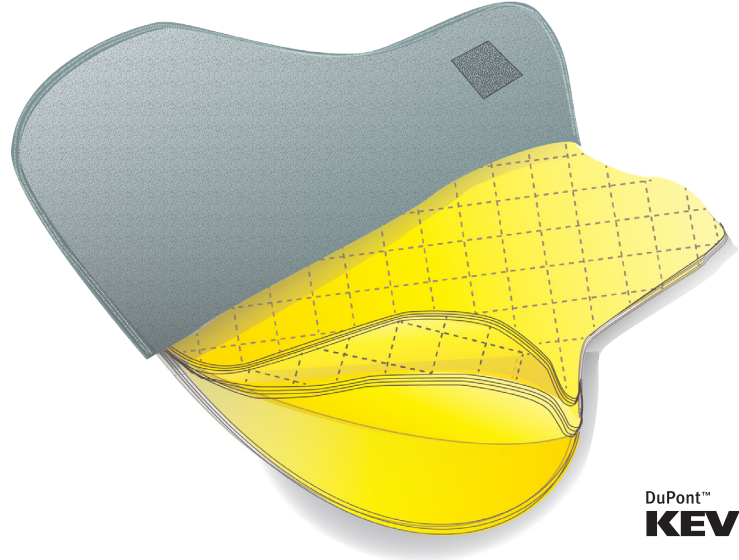

DuPont™  
**KEVLAR®**



## BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1618 fps	.357 Mag New V50	1574 fps
9mm Conditioned V50	1624 fps	.357 Mag Conditioned V50	1542 fps
9mm BFS	27.7 mm	.357 Mag BFS	31.3 mm
9mm New RPI	1470.9	.357 Mag New RPI	1430.9
9mm Conditioned RPI	1476.4	.357 Mag Conditioned RPI	1401.8

## SPIKE RESISTANCE RATING

Protection Threat	Level 2	Energy Level 1 (E1)/Joules	24.3ft-lbs/33J
Protection Class	Spike	Energy Level 2 (E2)/Joules	36.9ft-lbs/50J

**WARNING:** This product is not intended to protect the wearer from commercially-made edged weapons or rifle fire.



1 Sentry Drive | PO Box 280 | Dover, TN 37058  
(866) 920-5940 | [www.gharmorsystems.com](http://www.gharmorsystems.com)

**READY IS THE ONLY OPTION.**