




ProX IIIA PX03

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

STANDARD	NIJ 0101.06
NIJ MODEL	BA-3A00S-MR01
SERIES	PX03
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	1.27 psf
THINNESS	0.30"
SIZE RANGE	C1-C5
COMPOSITION	Honeywell® Gold Shield®, Teijin Twaron® Sentinel®
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

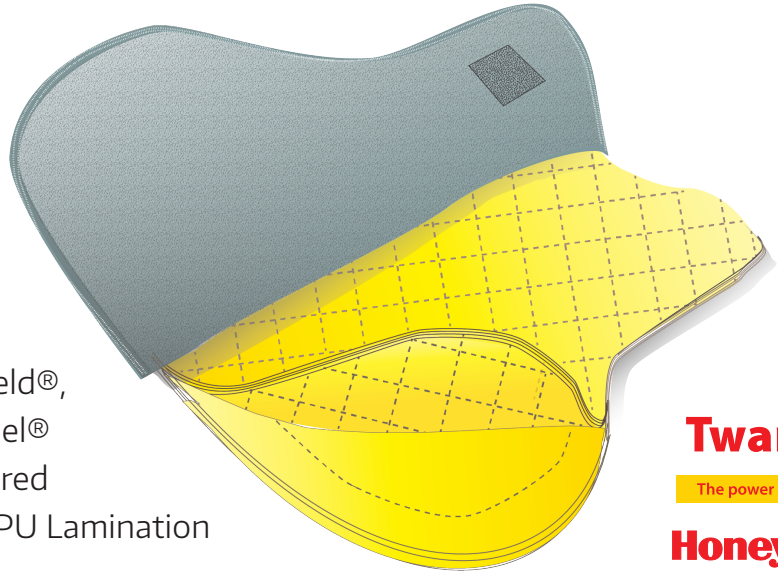

Twaron®
The power of Aramid
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1818 fps	44 Mag New V50	1681 fps
.357 Sig Conditioned V50	1743 fps	.44 Mag Conditioned V50	1592 fps
.357 Sig BFS	28.5 mm	.44 Mag BFS	36.9 mm
.357 Sig New RPI	1431.5	.44 Mag New RPI	1323.6
.357 Sig Conditioned RPI	1372.4	.44 Mag Conditioned RPI	1253.5

SPECIAL THREAT TESTING

9mm 127 gr. +P+ SXT | .357 Sig 125 gr. GDHP | .40 S&W 165 gr. SXT | 9mm 100GR. RHT Frangible
7.62x25mm 85Gr. FMJ Romanian Tokarev | 9mm 124Gr GDHP | 40 S&W 165Gr. JHP | 2, 4, 16, 64gr RCC
Special threat testing conducted at NIJ certified independent laboratory



1 Sentry Drive | PO Box 280 | Dover, TN 37058
(866) 920-5940 | www.gharmorsystems.com

READY IS THE ONLY OPTION.