




HELIX IIIA HX04

TECHNICAL SUMMARY & NIJ DATA

THREAT
LEVEL
IIIA

| | |
|---------------|--|
| STANDARD | NIJ 0101.06 |
| NIJ MODEL | GPHIIIA |
| SERIES | HX04 |
| THREAT LEVEL | IIIA |
| GENDER | Neutral |
| AREAL DENSITY | 0.95 psf |
| THINNESS | 0.24" |
| PLY COUNT | 44 |
| SIZE RANGE | C1-C5 |
| COMPOSITION | Duraflex® / Spectra Shield® Hybrid |
| STITCHING | Perimeter Stitch |
| PANEL COVER | Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System |
| WARRANTY | 5 Years |

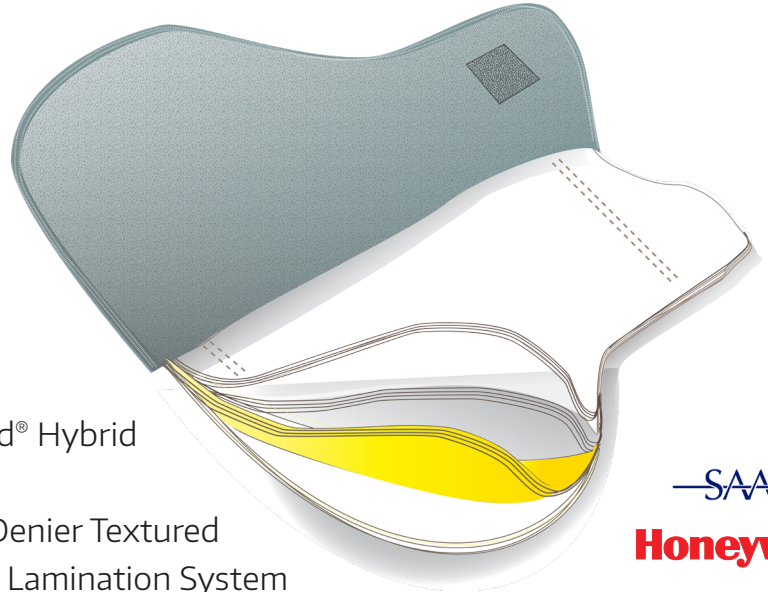

—SAATI
Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

| | | | |
|--------------------------|----------|-------------------------|----------|
| .357 Sig New V50 | 1820 fps | .44 Mag New V50 | 1671 fps |
| .357 Sig Conditioned V50 | 1785 fps | .44 Mag Conditioned V50 | 1663 fps |
| .357 Sig BFS | 29.1 mm | .44 Mag BFS | 38.0 mm |
| .357 Sig New RPI | 1916 | .44 Mag New RPI | 1759 |
| 357 Sig Conditioned RPI | 1879 | .44 Mag Conditioned RPI | 1751 |

SPECIAL THREAT TESTING

Winchester 9mm 127gr SXT +P+ RA9TA | Speer .357 SIG 125gr GDHP | 7.62 X 25 85gr Tokarev
 FN 5.7mm X 28mm 28/SS195 LF Hollow Point | FN 5.7mm X 28mm 40gr SS197 Blue Tip
 Special threat testing conducted at NIJ certified independent laboratory