




# PROX IIPX04

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**II**

STANDARD	NIJ 0101.06
NIJ MODEL	BA-2000S-BV02
SERIES	PX03
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	1.22 psf
THINNESS	0.32"
SIZE RANGE	C1-C5
COMPOSITION	Dupont Kevlar®
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

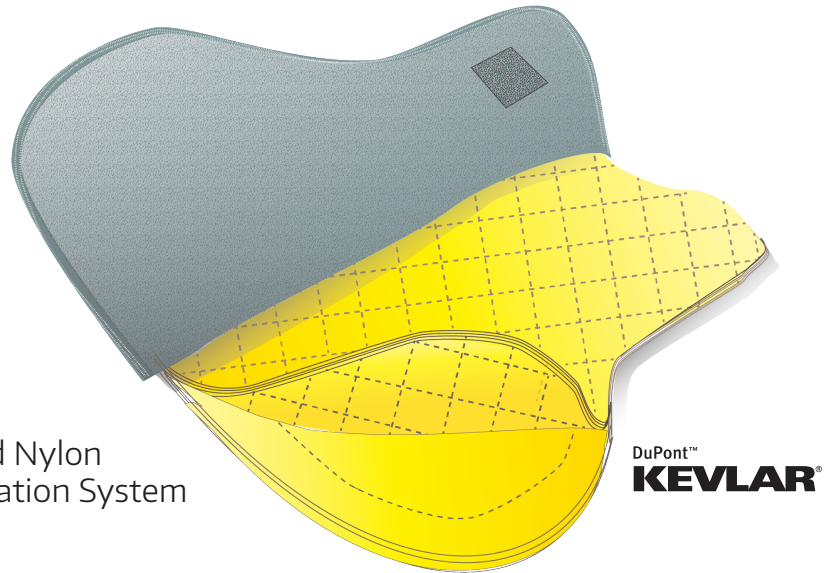

DuPont™  
**KEVLAR®**



### BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1736 fps	.357 Mag New V50	1688 fps
9mm Conditioned V50	1710 fps	.357 Mag Conditioned V50	1642 fps
9mm BFS	29.8 mm	.357 Mag BFS	33.8 mm
9mm New RPI	1423	.357 Mag New RPI	1383
9mm Conditioned RPI	1401	.357 Mag Conditioned RPI	1345

### SPECIAL THREAT TESTING

9 mm 124 gr. +P+ SXT | .357 Sig 125 gr. GDHP | .40 S&W 165 gr. SXT | .40 S&W 165 gr. SXT

Special threat testing conducted at NIJ certified independent laboratory