




# PROX IIIA PX04

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL  
**IIIA**

STANDARD	NIJ 0101.06
NIJ MODEL	BA-3A00S-BV02
SERIES	PX04
THREAT LEVEL	IIIA
GENDER	Neutral
AREAL DENSITY	1.56 psf
THINNESS	0.40"
SIZE RANGE	C1-C5
COMPOSITION	Dupont Kevlar®
PANEL COVER	2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
WARRANTY	5 Years

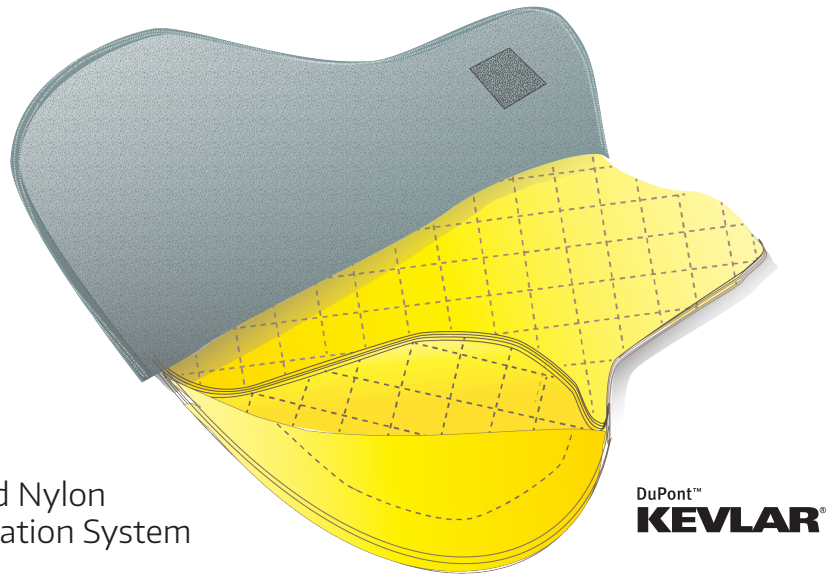

DuPont™  
**KEVLAR®**



## BALLISTIC PERFORMANCE AT CERTIFICATION

.357 Sig New V50	1880 fps	44 Mag New V50	1673 fps
.357 Sig Conditioned V50	1839 fps	.44 Mag Conditioned V50	1670 fps
.357 Sig BFS	27.5 mm	.44 Mag BFS	34.2 mm
.357 Sig New RPI	1205	.44 Mag New RPI	1072
.357 Sig Conditioned RPI	1178	.44 Mag Conditioned RPI	1070

## SPECIAL THREAT TESTING

9mm 127 gr. +P+ SXT | .357 Sig 125 gr. GDHP | .40 S&W 165 gr. SXT | 9mm 124 gr. HST

Special threat testing conducted at NIJ certified independent laboratory