

TALON 2 TO 2

TECHNICAL SUMMARY & NIJDATA

THREAT LEVEL 2

NIJ 0115.00 STANDARD GPS2-1 NIJ MODEL **SERIES** T02 THREAT LEVEL Spike 2 **GENDER** Neutral **AREAL DENSITY** 0.43 psf **THINNESS** 0.11" COMPOSITION Kevlar[®] Correctional™ STITCHING Single Tack Dual Covered, 2 Ply, 70 Denier PANEL COVER Textured Nylon Ripstop with TPU


Lamination System

5 Years

Patented ProTect®Material

DESICCANT

WARRANTY

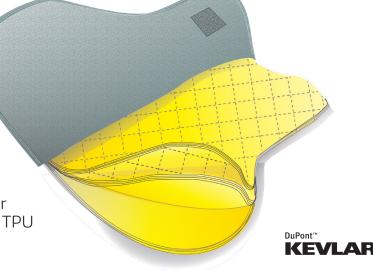





SPIKE RESISTANCE RATING			
Protection Threat	Level 2	Energy Level 1 (E1)/Joules	24.3ft-lbs/33J
Protection Class	Spike	Energy Level 2 (E2)/Joules	36.9ft-lbs/50J

WARNING: This product is not intended to protect the wearer from commercially-made edged weapons, handgun or rifle fire.

