


|               |  |
|---------------|--|
| STANDARDS     | NIJ 0101.06<br>NIJ 0115.00   |
| NIJ MODEL     | GPMII2-4   |
| SERIES        | TX02   |
| THREAT LEVELS | Level II<br>Spike 2  |
| GENDER        | Neutral  |
| AREAL DENSITY | 1.10 psf   |
| THINNESS      | 0.34"  |
| PLY COUNT     | 36   |
| SIZE RANGE    | C1-C5  |
| COMPOSITION   | Kevlar® Hybrid   |
| STITCHING     | Diamond Quilt, Top Stitch  |
| PANEL COVER   | Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System |
| DESICCANT     | Patented ProProtect® Material  |
| WARRANTY      | 5 Years  |



DuPont™  
**KEVLAR®**

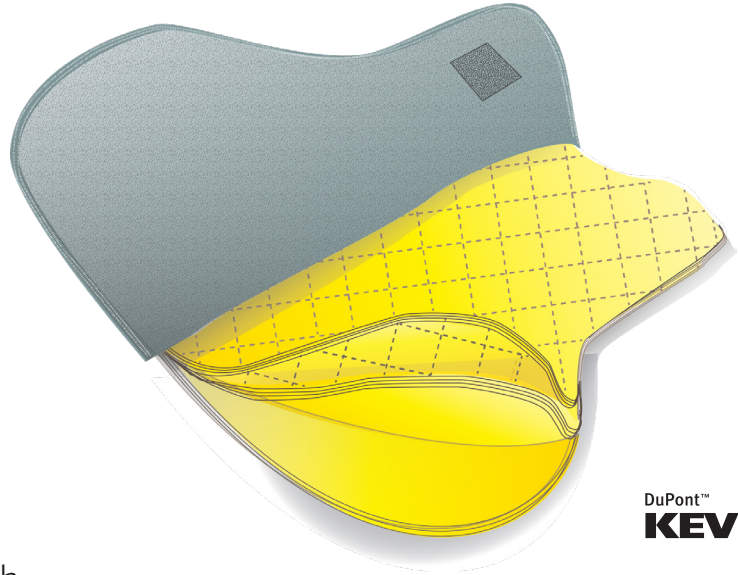

### BALLISTIC PERFORMANCE AT CERTIFICATION

|                     |          |                          |          |
|---------------------|----------|--------------------------|----------|
| 9mm New V50         | 1618 fps | .357 Mag New V50         | 1574 fps |
| 9mm Conditioned V50 | 1624 fps | .357 Mag Conditioned V50 | 1542 fps |
| 9mm BFS             | 27.7 mm  | .357 Mag BFS             | 31.3 mm  |
| 9mm New RPI         | 1471     | .357 Mag New RPI         | 1431     |
| 9mm Conditioned RPI | 1476     | .357 Mag Conditioned RPI | 1402     |

### SPIKE RESISTANCE RATING

|                   |         |                            |                |
|-------------------|---------|----------------------------|----------------|
| Protection Threat | Level 2 | Energy Level 1 (E1)/Joules | 24.3ft-lbs/33J |
| Protection Class  | Spike   | Energy Level 2 (E2)/Joules | 36.9ft-lbs/50J |

**WARNING:** This product is not intended to protect the wearer from commercially-made edged weapons or rifle fire.